

Accessory for Handheld Transceivers

DEH7M/K/S/V:Earphone

DEH 7M ϕ 3.5 Single plug type for ICOM, YAESU, STANDARD, ALINCO
DEH 7K ϕ 2.5 Single plug type for KENWOOD
DEH 7S ϕ 3.5 4 Pole type (water proof), one plug for STANDARD
DEH 7V ϕ 3.5 4 Pole type, one plug for ICOM, YAESU, STANDARD

Frequency range: 100MHz to 2000MHz

In put Earphone: 15mW (MAX)

Impedance: 32 Ω / Cable lenght: 1.5m (M/K), 1.0m (S/V)



DEH17M/K/S/V:Earphone

DEH17M ϕ 3.5 L-plug For ICOM, YAESU, STANDARD, ALINCO
DEH17K ϕ 2.5 L-plug For KENWOOD
DEH17S ϕ 3.5 4 poles straight plug, waterproof For STANDARD
DEH17V ϕ 3.5 4 poles L-plug For ICOM, YAESU, STANDARD

Frequency range: 20Hz to 3500Hz

In put Earphone: 5mW (MAX)

Impedance: 32 Ω

Weight: 20g Cable Length: 1.0m



HE27M/K:Earphone

Earphone: Magnetic earphone Impedance: 32 Ω

Frequency: 20Hz ~ 20kHz

Power: 4mW (Max) Weight: 6g

Code length: 75cm

Plug: HE27M ϕ 3.5 straight plug

HE27K ϕ 2.5 straight plug



HE37:Earphone

Soft earplug type

For ICOM, YAESU, STANDARD / Frequency: 20 to 4000Hz /

Power: 500mW (Max) / Impedance: 8 Ω

Earphone: Magnetic earphone / Code: Twist type, approx. 1m /

Connector: 3.5mm straight plug



HE47M/K/P:Earphone

HE47M ϕ 3.5 L plug for ICOM, YAESU, STANDARD, ALINCO

HE47K ϕ 2.5 L plug for KENWOOD

HE47P ϕ 3.5 Straight plug for (ICOM, YAESU, STA

Frequency range: 20Hz to 4500Hz

In put Earphone: 300mW (MAX) / Impedance: 8 Ω /

Cable lenght: 1.0m



HE57M/K/S/V:Earphone

HE57M ϕ 3.5 1 plug type for ICOM, YAESU, STANDARD, ALINCO

HE57K ϕ 2.5 1 plug type for KENWOOD

HE57S ϕ 3.5 4 pole type, waterproof, one plug for STANDARD VX6/VX7

HE57V ϕ 3.5 4 pole type, one plug for ICOM, YAESU, STANDARD

In-Put Earphone: 80mW (MAX), Impedance: 32 Ω

Weight: 20g, Cable Length: 75cm



HE77M/K:Earphone

HE77M ϕ 3.5 1plug type for ICOM, YAESU, STAND

HE77K ϕ 2.5 1plug type for KENWOOD

Frequency: 300Hz-20KHz

In-put Earphone: 40mW (MAX), Impedance: 32 Ω

Weight: 20g, Cable length: 1.1m (MAX)



HE87M/K:Earphone

HE77M ϕ 3.5, 2 plugs for ICOM, STANDARD, YAESU, ALINCO

HE77K ϕ 2.5, 2 plugs for KENWOOD

Weight: 20g / Code length: 50cm (Max)

Frequency: 300Hz-20KHz, IN-PUT earphone: 80mW (Max)

Impedance: 32 Ω



MS800M/K/S/ID/L/LS/KD/VD:Speaker Microphone

MS800M 2 plugs straight type for ICOM, STANDARD, ALINCO

MS800K 2 plugs L type for KENWOOD

MS800S 1 plug waterproof for STANDARD, ALINCO

MS800ID Special plug for ICOM

MS800L 2 plugs L type for ICOM

MS800LS 2 plugs L type slim for ICOM

MS800KD Special plug for KENWOOD

MS800VD Special plug for STANDARD, YAESU

In-Put Speaker: 500mW (MAX) 8 Ω

Microphone: ECM TYPE, 2.2k Ω

Microphone Sensibility: -40 $\pm$ 2dB

Cable length: approx. 2.0m, Weight: 105g



MS900WID/KD/VD/S:Speaker Microphone

MS900WID Special plug for ICOM IC-DPR5

MS900WKD Special plug for KENWOOD TPZ-D503

MS900WVD Special plug for VERTEX STANDARD VXD-10

MS900WS 1 plug waterproof for STANDARD, ALINCO

Weight: 150g

Speaker-PUT: 1W (Max)

Impedance: 8 Ω

Microphone: 2.2k Ω ECM type

Microphone sensibility: -40 $\pm$ 2dB

Code length: 1.5m (Max)

Remarks: Waterproof type



EM15M/K/S/L/ID:Earphone Microphone

EM15M 2 plugs straight type for ICOM, STANDARD, ALINCO

EM15K 2 plugs L type for KENWOOD


EM15S 1 plug waterproof for STANDARD, ALINCO

EM15L 2 plugs L type for ICOM

EM15ID Special plug for ICOM



EM/MS Series plug

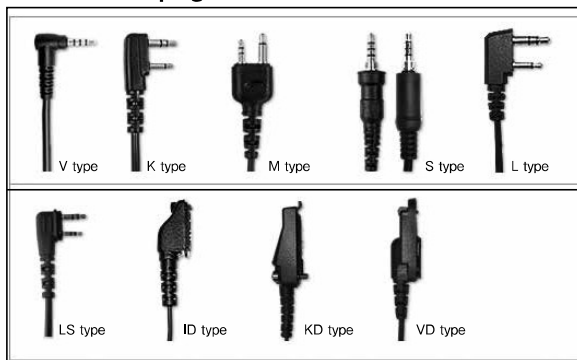

V type
 ϕ 3.5
4poles
K type
Speaker: ϕ 2.5
Microphone: ϕ 3.5
M type
Speaker: ϕ 3.5
Microphone: ϕ 2.5
S type
 ϕ 3.5
4poles
L type
Speaker: ϕ 3.5
Microphone: ϕ 2.5
LS type
Speaker: ϕ 3.5
Microphone: ϕ 2.5
ID type
special plug
KD type
special plug
VD type
special plug

DEM20M/K/V/S:Earphone Microphone

DEM20M 2 plugs type for ICOM, YAESU, STANDARD, KENWOOD

DEM20K 2 plugs type for KENWOOD

DEM20V 1 plug type for ICOM, YAESU, STANDARD

DEM20S 1 plug type (water proof) for STANDARD

Built-in PTT locking mechanism / Direction free clip


Impedance: 32 Ω / Microphone: 2.2kohms ECM

Earphone input: 5mW (MAX) / Weight: 34g /

Cable length: Approx. 1.0m



DEM Series plug

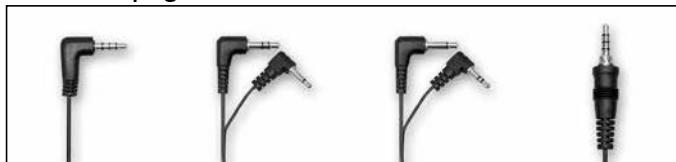

V type
 ϕ 3.5
4poles
K type
Speaker: ϕ 2.5
Microphone: ϕ 3.5
M type
Speaker: ϕ 3.5
Microphone: ϕ 2.5
S type
 ϕ 3.5
4poles

MIC10M/K/S/LS/ID/KD/VD

Microphone: 2.2k Ω ECM type

Microphone sensibility: -32 $\pm$ 3dB

Weight: 40g

Code length: 85cm

with earphone Jack ϕ 2.5, 2poles

Recommended earphone Impedance: 32 Ω

MIC10M Speaker ϕ 3.5, Microphone ϕ 2.5

MIC10K Speaker ϕ 2.5, Microphone ϕ 3.5

MIC10S ϕ 3.5 4 poles straight plug waterproof

MIC10LS L type Speaker ϕ 3.5, Microphone ϕ 2.5

MIC10ID Digital convenience radio for ICOM

MIC10KD Digital convenience radio for KENWOOD

MIC10VD Digital convenience radio for YAESU



Earphone for MIC10

