


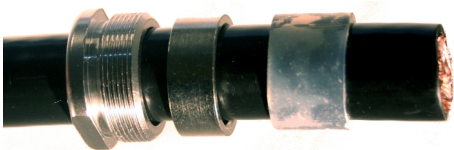


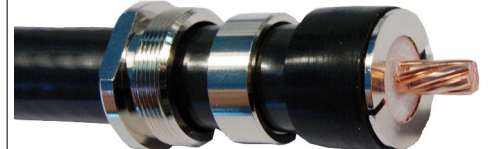


Mounting instruction



Ecoflex® 15 Plus Heatex, SeaTex® 15

N plug solderless / Item no.: 7351

www.ssb-electronic.com

<p>Required tools:</p> <ul style="list-style-type: none">2 x open-ended spanner 19 mm1 x cutter knife1 x scissors1 x metal saw1 x small file1 x heat gun	
1	 <p>Cut off cable tail right-angled with a small metal saw. The inner conductor must remain absolutely round.</p>
2	 <p>Move the nut, clamping ring and rubber washer over the cable tail.</p>
3	 <p>Remove 9 mm of the outer sheath with a cutter knife.</p>
4	 <p>Bend copper braid upwards right-angled. Heat the cable with the hot air gun (approx. 150°C). Insert contact sleeve between copper foil and braid until stop. Cut off protruding braid. Move the rubber seal to the front, up to the contact sleeve.</p>
5	 <p>Remove the copper foil and the dielectric with a cutter knife. The inner conductor must stay absolutely round. Deburr the sharp edges with a file.</p>
6	 <p>Slide the inner conductor into the Teflon insulator. Then carefully attach the inner pin to the inner conductor. Push the cable end prepared in this way into the connector housing as far as it will go.</p>
7	 <p>Tighten the clamping nut hand-tight with two 19 mm open-ended wrenches. A gap of 1 to 1,5 mm must still be visible between the nut and the connector housing!</p>